

WIDEX EVOKE™ RIC WITH SOUNDSSENSE LEARN TECHNOLOGY




The WIDEX RIC is based on the WIDEX E-platform, with Fluid Sound Technology that handles automatic processing more accurately and faster than before. WIDEX RIC is the first hearing aid to use SoundSense Learn to learn from the wearer's preferences and help guide them to a better, more personalized sound. The RIC has an optional ZPower rechargeable solution.

2.4 GHz Bluetooth connectivity with the customizable App allows for direct streaming of audio as well as direct control from smartphones and tablets.

- Direct wireless mobile connectivity (2.4 GHz)
- Multiple wireless connectivity options via WidexLink technology and TONELINK App
- Compatible with the DEX assistive listening devices
- 4 performance levels 440/330/220
- Uses an M-receiver
- Uses a size 312 battery
- Protection class IP68 (only non-rechargeable solution)
- Minimal to severe hearing losses

SUGGESTED FITTING RANGE

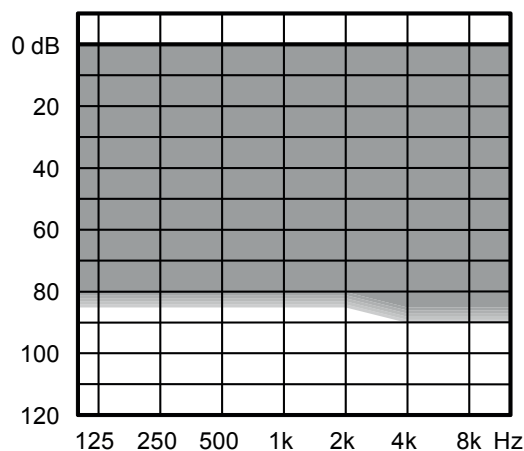

STANDARD TECHNOLOGY

- E-platform with Fluid Sound Controller
- Improved Widex rationale
- Acclimatization rationale
- Power Saver IV technology for low current consumption

| KEY FEATURES | 440 | 330 | 220 |
|-------------------------------------|--------|-------|------|
| Performance | xxxxxx | xxxxx | xxxx |
| Processing and fine-tuning channels | 15 | 12 | 10 |

CONNECTIVITY

| | | | |
|---|---|---|---|
| 2.4 GHz control (Android and iOS) | • | • | • |
| 2.4 GHz audio streaming (iOS) | • | • | • |
| WidexLink to DEX assistive listening devices* | • | • | • |
| Telecoil | • | • | • |

APPS FOR iOS AND ANDROID

| | | | |
|---------------------------------|---|---|---|
| EVOKE App with SoundSense Learn | • | • | • |
| EVOKE App | • | • | • |
| TONELINK App | • | • | • |
| COM-DEX App | • | • | • |

FEATURES


| | | | |
|--------------------------------------|---------|--------|---|
| Adaptation manager | • | • | • |
| Fluid Sound Analyzer (sound classes) | 11 (IE) | 7 (IE) | 4 |
| Programs | 5 | 4 | 3 |
| Smartwind Manager | • | | |
| High-frequency boost | • | | |
| Speech Enhancer | RT/IE | IE | |
| Digital Pinna | • | • | |
| HD Locator | • | • | • |
| TruSound Softener | • | • | • |
| SoundSense Adapt | • | • | • |
| Preference control | • | • | • |
| Programmable Push Button** | • | • | • |
| Soft-level noise reduction | • | • | • |
| Noise Reduction | • | • | • |
| ZEN IE | • | • | • |
| Audibility Extender | • | • | • |

*Also includes DEX assistive listening devices: CALL-DEX, TV-DEX, COM-DEX, UNI-DEX, RC-DEX, FM+ DEX, PHONE-DEX, COM-DEX Remote Mic


**Programmable: Preference Control, program shift or a combination of the two

*WIDEX EVOKE, direct streaming, is compatible with the following devices: iPhone X, iPhone 8, iPhone 8 Plus, iPhone 7, iPhone 7 Plus, iPhone 6, iPhone 6Plus, iPhone 6S, iPhone 6SPlus, iPhone 5S and iPhone SE using iOS 10 or later. Apple, the Apple logo, iPhone, iPad and iPod touch are trademarks of Apple Inc., registered in the US and other countries.


MAXIMUM OUTPUT - EAR SIMULATOR

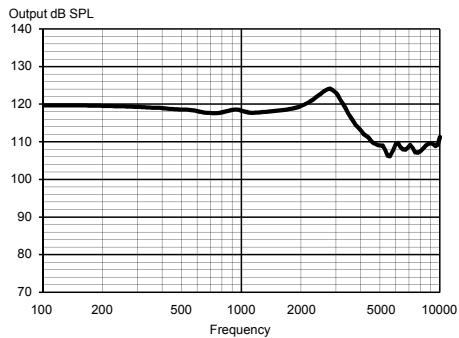


MAXIMUM OUTPUT - 2CC COUPLER

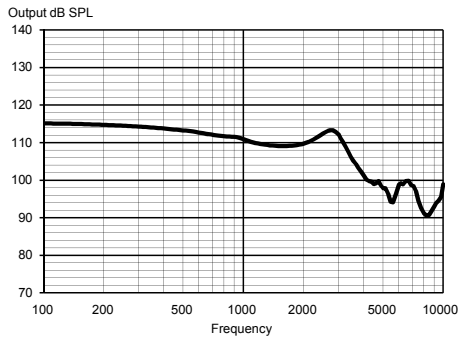

OUTPUT - EAR SIMULATOR

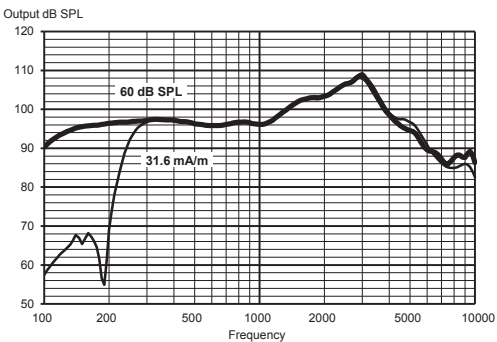

OUTPUT - 2CC COUPLER

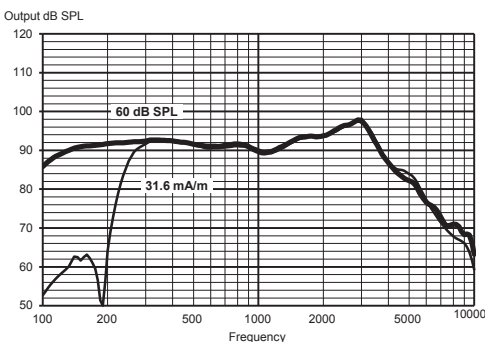

Technical data: Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact Widex at global.widex.com.

| | | EAR SIMULATOR IEC 60118-0:1983 + A1:1994 | 2CC COUPLER IEC 60118-0:2015, ANSI S3.22-2014 |
|---|-----------------------------|---|--|
| OSPL90 | 1600 Hz Peak Average | 118 dB SPL 124 dB SPL 118 dB SPL | 108 dB SPL 114 dB SPL 110 dB SPL |
| Acoustic output (Input 60 dB SPL) | 1600 Hz Peak Average | 103 dB SPL 108 dB SPL 99 dB SPL | 93 dB SPL 98 dB SPL 93 dB SPL |
| Full-on gain (Input 50 dB SPL, Compass Full-on gain) | 1600 Hz Peak Average | 61 dB 69 dB 62 dB | 52 dB 58 dB 55 dB |
| Telecoil output (Input 31.6 mA/m) | 1600 Hz Peak Average | 103 dB SPL 108 dB SPL 99 dB SPL | 93 dB SPL 98 dB SPL 93 dB SPL |
| Acoustic frequency range | | 100 Hz - 10000 Hz | 100 Hz - 7000 Hz |
| Harmonic distortion (typical) | 500 Hz 800 Hz 1600 Hz | <2% <2% <2% | <2% <2% <2% |
| Equivalent input noise | | 21 dB SPL | 21 dB SPL |
| Battery drain (standby) | | 1.00 mA | 1.00 mA |
| Battery drain* | | 1.02 mA | 1.04 mA |
| Battery life (Type 312 Zn-Air, 170 mAh)* (Type 312 rechargeable, 40 mAh) | | 165 h 40 h | 165 h 40 h |
| Mobile phone immunity (IEC 60118-13:2016, ANSI C63.19:2011) | | IRIL: -21/-19/-9 dB SPL | U-rating: M4/T4 |

*Battery life in real-life situations depends among other things on the hearing aid features used, streaming time, and the quality of the battery used.
Do not modify this equipment without authorization of the manufacturer. Spare parts and instructions for correct repair can be acquired from Widex.